

TECHNICAL SPECIFICATIONS



ABJ - 1500

STANDARD PROPERTIES

Preheater
Batteries and cables
Electronic battery charger
Fuel tank integrated in the chassis
Flexible fuel hoses and oil drain valve
Electrostatic powder painted chassis made of steel sheet welded
Stainless galvanized steel cabinet design

OUTPUT VALUES

Standby Power		Prime Powe		r		
kVA	kW	Ampere		kVA	kW	Ampere
1500	1200	2168		1375	1091	1971

DIESEL ENGINE

ISO 8528, ISO 3046, BS 5514, DIN 6271 state-of-the-art engine brands with low fuel consumption, fuel pump mounted, mechanical or electronic type governor are used.

Brand	Baudouin		
Model	12M33G1500/5		
Max Total Output Power (kWm/hp)	1320/1775		
Cylinder Volume (It)	39,2		
Cylinder Arrangement	12 V		
Bore x Stroke (mm*mm)	150*185		
Governor Type	Electronic		
Cycle (Rotation)	1500 RPM		
Intake System	Turbocharge/Intercooler		
Spray Type	Directly		
Cooling Type	Water Cooled		
Electric System (VCD)	24		
Oil Capacity (It)	146		
Cooling Water Capacity (It)	233		
Fuel Consumption %50 (lt/h)	150		
Fuel Consumption %75 (lt/h)	220		
Fuel Consumption %100 (lt/h)	298		



TECHNICAL SPECIFICATIONS

ALTERNATOR

4-pole self-excited brushless, synchronous alternator, maintenance-free bearing system, providing precise voltage adjustment with electronic type voltage regulator.


Output Voltage (V)	230/400		
Frequency (Hz)	50		
Permanent Voltage Reg. (±) (%)	0,01		
Short Circuit Current	% 300 (10 sec)		
Insulation Class	Н		
Protection Class	IP23		
Efficiency(%)	94,2		
Working Time at Overload	% 110 for 1 hour		
Power Factor (cos Phi)	0,8		
Total Harmonic Distortion Rate	% 1 less than		
Connection Style	Phillips (Star)		
Pole Number	4		
Number of Beds	Single		
Cabin Type	30		

Altaş Generator reserves the right to make changes in the technical specifications and cabin dimensions in advance due to the ongoing developments in generator technology without prior notice..

DIMENSIONS AND WEIGHT

CABINET GROUP	Width (mm)	2440		Width (mm)	2300
	Size (mm)	9150		Size (mm)	5500
	Height (mm)	3000	CABINLESS	Height (mm)	2500
	Weight (Kg)	9550	GROUP	Weight (Kg)	8450
	Fuel Tank Capacity (Lt)	1500	GNOOI	Fuel Tank Capacity (It)	1500



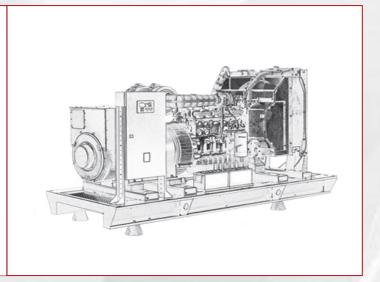



TECHNICAL SPECIFICATIONS

OPTIONAL FEATURES

- · Sound insulation cabin
- Transfer board
- Fuel water separator filter
- Alternator output switch
- Fuel tank heater
- Oil heater
- External fuel tank and transfer pump
- Remote monitoring and control
- Synchronization systems
- Special type exhaust silencer
- Trailer

CONTROL PANEL FEATURES



- · Diesel and gas generator support
- 400 Hz generator support
- Event record with 400x measurement value
- All parameters can be changed from the front panel
- 3 level program password
- 128x64 pixel graphic LCD
- Language upload
- Current-voltage waveform
- Current-voltage harmonic analysis
- 16 Amp / 250V ŞK / JK outputs
- 8 programmed digital inputs
- 6 programmed digital outputs
- 3 programmed analog inputs
- CANBUS-J1939 & amp; MPU input
- 3 scheduled service alarms
- Multiple automatic test program

- 609 / 5000 Çeviri sonuçları Weekly work schedule
- Dual generator support, equal aging Fine speed adjustment (some ECUs)
- Automatic fuel pump control
- Protection cancellation feature
- Overpower protection
- Reverse power protection
- Overcurrent IDMT protection
- Load shedding, dummy load
- Multiple load shedding programs
- Current unbalance protection
- Voltage unbalance protection
 Fuel filling and theft alarms
- Battery backed real time clock
- Idle speed control
- Battery charging operation
- Battle mode support

- Multiple nominal condition definitions
- · Contactor and motorized switch drive
- 4 quarter energy meters
- Network energy meters
- Fuel fill counter
- Fuel consumption counter
- Modem dignostik page

Via USB, RS-232 and GPRS parameter setting

- Free configuration software
- SMS control facility
- Ready to watch the center
- Mobile generator support
- Automatic GSM geolocation GPS connection (RS232)
- Installing software via USB
- IP65 protection (with gasket)

Armak Makine Mühendislik İnş. San. ve Tic. Ltd. Şti.

Denizköşkler Mah. Tunay Sk. No:28 Avcılar / İSTANBUL / TURKEY

T: 0212 694 66 66 F: 0212 593 09 60

armakmakine@armakmakine.com w w w . a r m a k m a k i n e . c o m